

# ilektro™

Slimline Range  
electric fire



**glow**  
HEATING • COOLING • ELECTRICAL

**GLOW CITY**  
352 Morphett Road  
Warradale SA 5046  
8397 6100

**GLOW SOUTH COAST**  
16 Wright Road  
Goolwa SA 5214  
8554 2860

[info@glowhce.com.au](mailto:info@glowhce.com.au) | [glowhce.com.au](http://glowhce.com.au)



# ilekto™

## Slimline Range electric fire

Whether mounted on a wall or built into a nook, the ilekto Slimline's slender proportions and light weight make it an easy addition that simply brings spaces to life.

Featuring a full suite of settings that allow the ilekto Slimline to be adjusted to the room conditions and to suit your mood.

Enjoy the ilekto Slimline all year-round. The inbuilt heating system can be turned off at anytime leaving the Slimline flame to operate independently.

### WALL MOUNTED OR BUILT-IN

Slimline's simple mounting system allows it to be wall mounted, recessed into a wall nook or custom cabinetry.

### SLIMLINE FOR ANY SPACE

The ilekto Slimline comes in a choice of three sizes 50", 60" and 72".



### ilekto FLAME TECHNOLOGY

The ilekto Slimline delivers a lively flame that makes an impression in any space. Charred logs with a tailored ember bed complete the fireplace experience



### FLAME COLOURS

6 flame colours



### FLAME BRIGHTNESS

Flame brightness to change the mood in your room



### EMBER BED COLOUR

6 ember colours



### HEATER

3 heater settings ranging between 900W - 1800W and also heater off option for your comfort



### TIMER

9 timer settings for your comfort



### OPTIMAL CONTROL

Your flame is able to be controlled and customised by you along with the log fuel bed



### REMOTE HANDSET


Fully control all ilekto Slimline functions with the ilekto infra-red remote control



### WARRANTY


2 year warranty for added assurance

## ilekto Slimline dimensions

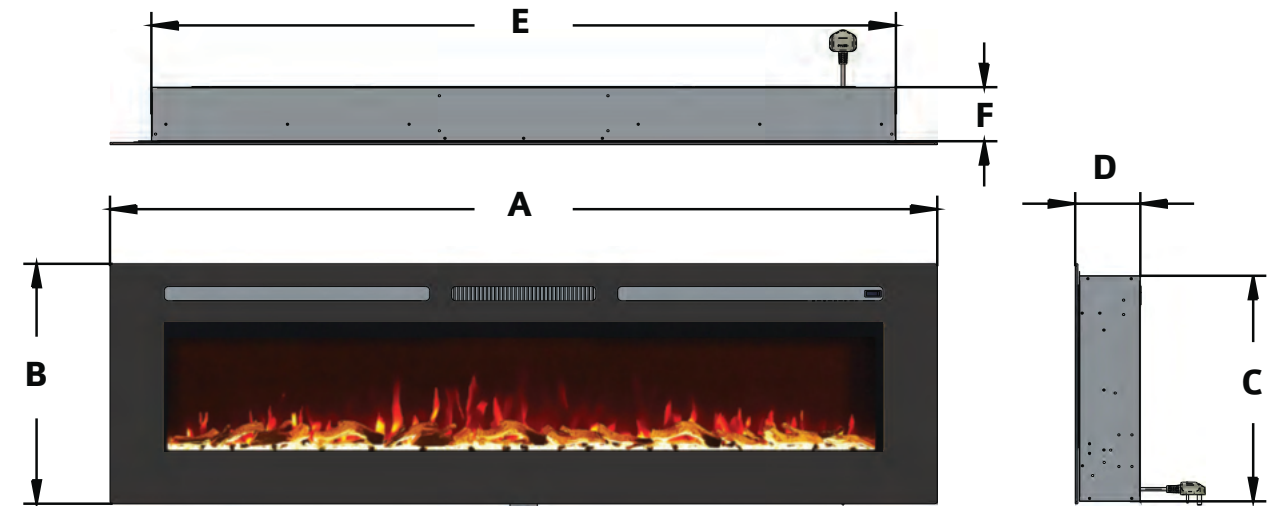

MODEL	A	B	C	D	E	F	WEIGHT (KG)
SL50	1270	500	470	120	1117	112	20
SL60	1524	500	470	120	1371	112	24
SL72	1828	500	470	120	1675	112	29

### BUILT-IN FRAME DIMENSIONS

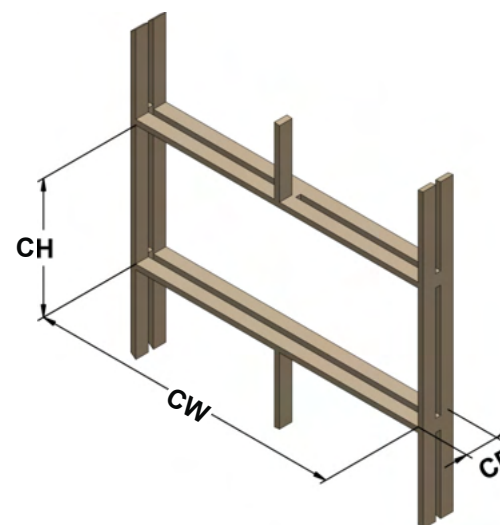

MODEL	CW	CH	CD
SL50	1126	480	120
SL60	1380	480	120
SL72	1684	480	120

\*CW - Cavity Width; CH - Cavity Height; CD - Cavity Depth

Note: All the dimensions given are in millimeters and are the minimum requirement. Before installing refer to the relevant product manual for full and up to date information.